

# OLE (UK)LTD

## Instrumentation Engineering

www.oleuk.com E-mail sales@oleuk.com

Barns A & B Bowley Farm Estate  
South Mundham Chichester  
West Sussex PO20 1NB  
Tel +44 (0)1243 267 930



C2020-A-WWW-Solar Shown



Features:

**Web site update once a day**  
**Timer wakes up and energises the Gauge**  
**and WEB sender every 24 hours**

## Easy Installation

Lower sensor into tank, tighten nut, and join 3 wires, plug in and set-up.

**A Tank fitting is supplied** to fit into a 1" Socket or a special 30 mm bored hole fitting is available, providing an IP65 seal.

**The Hydrostatic Tank sensor** comes with 6 meters cable as standard. (This can be extended by using an extension kit)

Standard probe suits tanks from **0.3 up to 3 meters high for fuel oils**, and up to **2.5 meters high for water based products** (higher tank options available)

## Power requirements/ Options

The Unit operates from the solar panel. No additional hardware required.

### Typical Applications

GASOIL , DIESEL, KEROSENE,.,  
LUBE OIL, COOKING OIL, GEAR OIL  
WATER, ANTI-FREEZE, ADBLUE , WINDSCREEN WASH

# C2020-WWW-S1

## 1.0% TANK GAUGE.

### + Web Viewer

### + Solar Kit.

Features:

**Timed reading 1% Tank Gauge**

**High & Low Local Alarm** (option -A kit)

**Bund Alarm Circuit** (Float supplied separately)

**Output 4-20 mA as standard**

**Local Calibration settings**

**Flashing Backlight when in Alarm**

**IP65 Weatherproof Enclosure.**

**Swipe magnet to wake up gauge**



## ANY TANK SHAPE



**Input tank sizes on simple screen,**  
Standard tank options include:

Rectangular,  
Horizontal with elliptical ends,  
Vertical with elliptical ends  
Vertical cylindrical flat base

Special selection strapping tables for any shaped tank  
- You provide strapping data, we supply the setting values-  
e-mail us sales@oleuk.com, and we will send you the numbers to enter into the Gauge. Simple as that.


**Base Models** C2020-0-WWW = Digital Gauge Kit  
C2020-A-WWW = Digital Gauge +High Low Alarm



### Options

B8 = Bund Alarm Probe  
OJ = Tank fitting expanding type for 30 mm bored hole.



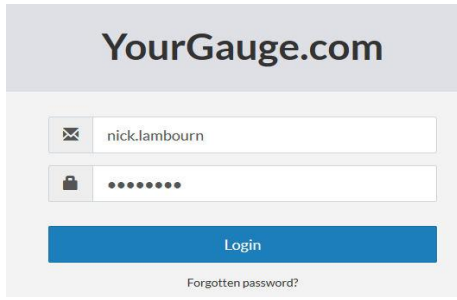


Simple Web Viewer


www.yourgauge.com

User Name XXXX (Demo) 'test'  
 Password XXXX 'test'



Depending upon access levels, you can now see, all Customers, all Sites, or just all Tanks

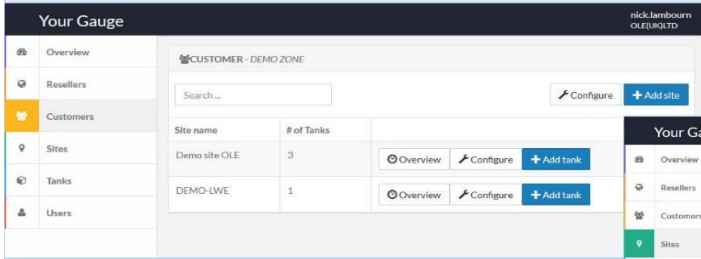


Customer Level Overview

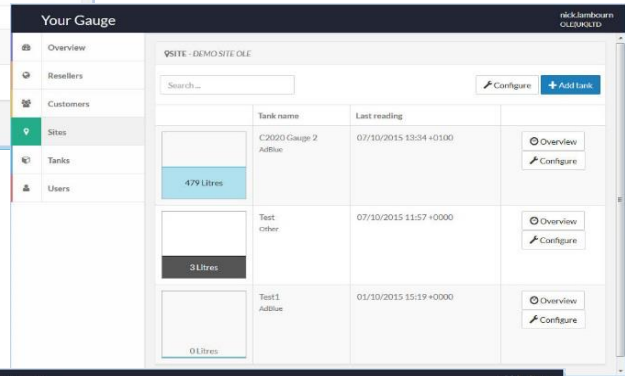


Simple GRAPH View

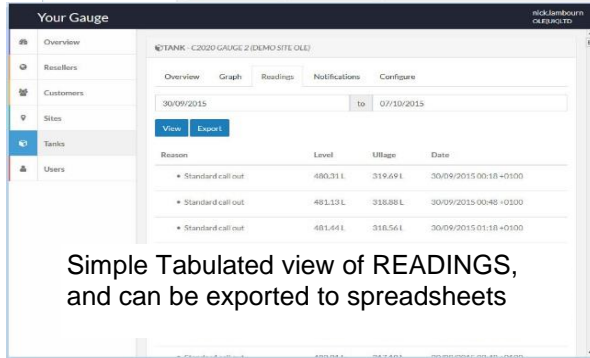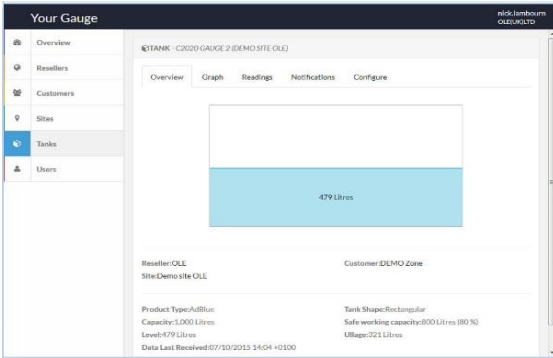

Simple Tabulated view of READINGS, and can be exported to spreadsheets

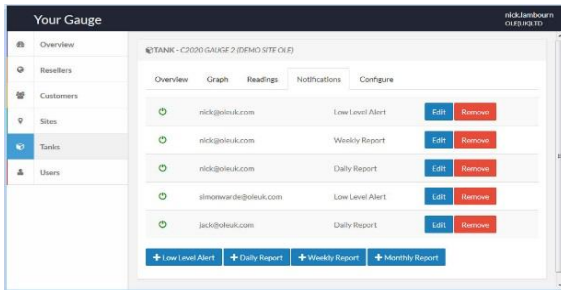

E-mail multiple recipients Daily Report, Weekly, Monthly, as well as % Trigger setting for Low Level Alerts (As many as you need).

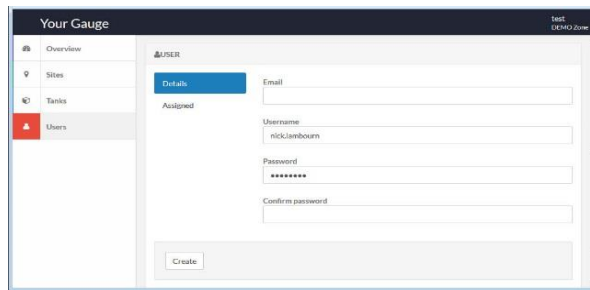

User set-up is simple at either Tank level, site level, or customer level.

**www.yourgauge.com** allows you to access your sites based on password control. If you have multiple clients, they can only access their specific sites, and specific sites can access their tank data.